


Nomad 3600 Series Technical Parameters

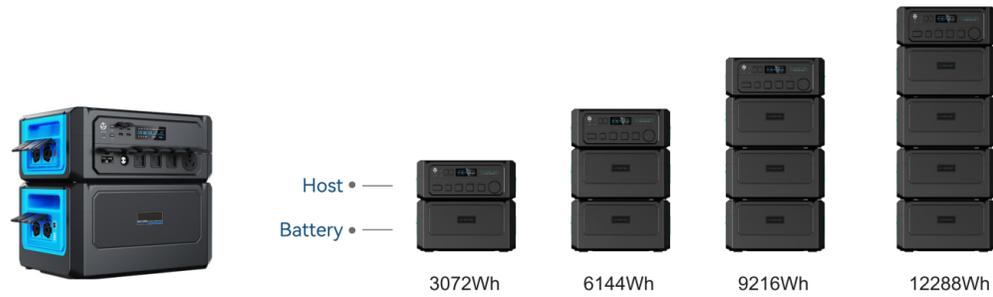

Model	Nomad 3600	
Items	JP/US	EU/AU
Host Parameter		
Housing	ABS + PC	
Dimensions (W x D x H)	465 × 306 × 193 mm	
Weight	11.5 kg	
Input		
XT60	11.5 V – 60 V, Max. 1000 W	
Battery Expansion	40 V – 51.2 V / 90 A Max.	
AC Input	100–120 V / 15 A / Max. 1800 W (50/60Hz)	220–240 V / 15 A / Max. 1800 W (50/60Hz)
Output		
Rated Output Voltage	100–120 V / 20 A / Max. 3600 W (50/60Hz)	220–240 V / 15 A / Max. 3600 W (50/60Hz)
TT30 * 1	100–120 V / 30 A / Max. 3600 W (50/60Hz)	---
Peak Power	5 400 W	7 200 W
Peak Power	2 400 W	
DC Output		
2 * USB-C	PD 100 W (5 V / 9 V / 12 V / 15 V / 20 V, Max. 5 A)	
2 * USB-A	18W (5 V / 3 A, 9 V / 2 A, 12 V / 1.5 A)	
1 * Car Socket	13.3 V / 15 A, Max. 199 W	
1 * Anderson Output	13.3 V / 45 A, Max. 665 W	
Battery parameters		
Nominal Capacity	3 072 Wh (51.2 V / 60 Ah)	
Dimensions (W×D×H)	465 × 306 × 249 mm	
Weight	29 kg	
Battery Pack Mode	40138 (LiFePO4)	
Cells Compound Mode	16S3P	
Battery Expansion * 2	40–51.2 V / 90 A Max.	

* The actual product may differ slightly from the pictures.
* The specifications are subject to change without prior notice.

Solar Folding Bag Technical Parameters



Items	KX 100
Open circuit voltage (Voc)§	20.58 V ±10%
Short circuit current (Isc)	6.75 A ±10%
Max. power voltage (Vm)	18 V ±10%
Max. power current (Im)	5.56 A ±10%
Max. power (Ppm)	100 W -5%/+10%
Transformation efficiency (EFF)	>24.8%
Waterproof and dustproof grade	IP67
Temperature range	-10°C ~ 65°C
Dimensions (unfolded)	1137×591×21 mm
Dimensions (folded)	591×569×42 mm
Weight	4.1 kg ±0.2 kg



Items	KX 400
Open circuit voltage (Voc)§	41 V ±10%
Short circuit current (Isc)	13.5 A ±10%
Max. power voltage (Vm)	36 V ±10%
Max. power current (Im)	11.1 A ±10%
Max. power (Ppm)	400 W -5%/+10%
Transformation efficiency (EFF)	>24.8%
Waterproof and dustproof grade	IP67
Temperature range	-10°C ~ 65°C
Dimensions (unfolded)	2554×959×21 mm
Dimensions (folded)	959×679×42 mm
Weight	19.4 kg ±0.2 kg

* The actual product may differ slightly from the pictures.
* The specifications are subject to change without prior notice.

KAIXENTEC

NOMAD SERIES

Modular. Mobile. Mission-Ready.

kaixentec.com

Nomad 600
Nomad 1200
Nomad 1600
Nomad 3600



Power Where You Need It

- High-efficiency LiFePO₄ batteries for long-lasting reliability
- Models range from 600W to 3600W inverter output
- Pure sine wave AC power – safe for sensitive electronics
- Modular expansion up to 12.2 kWh with Nomad 3600
- Built-in MPPT solar controller for optimized solar input

Rugged and Ready

- Shock-resistant ABS/PC enclosure
- Flame-retardant materials
- Reinforced corners and integrated handles
- Nomad-3600 includes trailer-ready wheels and frame

Smart Control & Versatile Output

- Bluetooth & Wi-Fi connectivity for remote monitoring
- HD LCD screen with live energy readouts
- Multiple output ports: USB-A, USB-C, DC, XT60, 220V AC
- Charge and power up to 12 various devices simultaneously
- Intelligent BMS with fault monitoring and protection

Off-Grid Freedom

- Supports AC, DC, and solar charging
- Optional portable solar bags (100W–400W)
- Lightweight, foldable, and waterproof panels
- Ideal for camping, RVs, marine, festivals, field work, or construction
- Silent operation with zero emissions

Nomad 1200 Series Technical Parameters



Model	Nomad 1200		
Items	JP	USA	EU/AU/ZA
Nominal Capacity	1152 Wh (25.6 V / 45 Ah)		
Dimensions (W x D x H)	365.4 × 235 × 274.5 mm		
Weight	13 kg		
Inverter waveform	Pure Sine Wave		
Input			
AC	90–120 VAC (50/60 Hz), Max. 700 W		200–240 VAC (50/60 Hz), Max. 700 W
XT60	11.5 V – 55 V, Max. 550 W		
DC5521	12 V / 10 A, 24 V / 10 A		
AC Output			
AC Inverter	1200 W total (*3)		
Nominal Output Voltage	100 VAC	120 VAC	220-240 VAC
Nominal Output Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Peak Power	2 400 W		
Nominal Power	1 200 W		
DC Output			
2 * USB-C	PD100W (5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A)		
2 * USB-A	18W (5V/3A, 9V/2A, 12V/1.5A)		
1 * Car Socket	13 V / 8 A, Max 100 W	Total share 8 A Max	
2 * DC5521	13 V / 3 A, Max 39 W		

* The actual product may differ slightly from the pictures.
* The specifications are subject to change without prior notice.

Nomad 1600 Series Technical Parameters



Model	Nomad 1600		
Items	JP	USA	EU/AU/ZA
Nominal Capacity	1536 Wh (25.6 V / 60 Ah)		
Dimensions (W x D x H)	370 × 311.5 × 235 mm		
Weight	16 kg		
Inverter waveform	Pure Sine Wave		
Input			
AC	90–140 VAC (50/60 Hz), Max. 800 W		180–240 VAC (50/60 Hz), Max. 800 W
XT60	11.5 V – 55 V, Max. 550 W		
DC5521	12 V / 10 A, 24 V / 10 A (Max. 240W)		
AC Output			
AC Inverter	1600 W total (*4)		
Nominal Output Voltage	100 VAC	120 VAC	220-240 VAC
Nominal Output Frequency	50/60 Hz	50/60 Hz	50/60 Hz
Peak Power	3 000 W		
Nominal Power	1 600 W		
DC Output			
2 * USB-C	PD100W (5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/5A)		
4 * USB-A	18W (5V/3A, 9V/2A, 12V/1.5A)		
1 * Car Socket	13 V / 10 A, Max 130 W	Total share 8A Max	
2 * DC5521	13 V / 3 A, Max 39 W		

* The actual product may differ slightly from the pictures.
* The specifications are subject to change without prior notice.

KAIXENTEC

NOMAD SERIES

Portable Power Station



Modular. Mobile. Mission-Ready.

Kaixentec B.V.
Brouwerstraat 30, 2984AR Ridderkerk
The Netherlands

kaixentec.com
sales@kaixentec.com
+31 88 888 2994